

Products List

Classification	Series	Note	Rated Voltage Range	Capacitance Range	Categorical Max. Temp. and Endurance	Pages
Radial Lead Type	<i>NS</i>	Standard	4.0 to 25V	10 to 1200 μ F	105°C 2000Hrs	8
	<i>R7</i>	Low ESR	2.5 to 16V	68 to 1500 μ F	105°C 2000Hrs	10
	<i>R5</i>	Ultra-Low ESR	2.5 to 6.3V	390 to 1500 μ F	105°C 2000Hrs	12
	<i>L8</i>	Low ESR and Low Profile (ϕ 8)	2.5 to 35V	100 to 1500 μ F	105°C 2000/5000Hrs	14
	<i>E5</i>	Ultra-Low ESR and Low Profile (ϕ 8)	2.5 to 4.0V	560 to 820 μ F	105°C 2000Hrs	16
	<i>S8</i>	Low ESR/ESL and Low Profile (ϕ 6.3)	2.5 to 16V	100 to 1200 μ F	105°C 2000/5000Hrs	18
	<i>F8</i>	Low ESR/ESL and Low Profile (ϕ 5)	2.5 to 6.3V	100 to 560 μ F	105°C 2000Hrs	20
	<i>NU</i>	Large Capacitance	2.5 to 63V	10 to 2700 μ F	105°C 2000/5000Hrs	22
	<i>NE</i>	Large Capacitance	2.5 to 16V	100 to 1200 μ F	105°C 2000Hrs	24
	<i>S6</i>	Miniature Sized Large Capacitance	2.5 to 25V	33 to 560 μ F	105°C 2000Hrs	26
	<i>HT</i>	High Temperature (125°C)	6.3 to 20V	150 to 820 μ F	125°C 1000Hrs	28
SMD Type	<i>PS/PA</i>	Standard (ϕ 6.3, ϕ 8, ϕ 10)	2.5 to 63V	8.2 to 1500 μ F	105°C 2000Hrs	30
	<i>HS/HA</i>	Large Capacitance (ϕ 8)	2.5 to 35V	100 to 1500 μ F	105°C 2000Hrs	32
	<i>SS/SA/SB</i>	Large Capacitance (ϕ 6.3)	2.5 to 35V	10 to 560 μ F	105°C 2000Hrs	34
	<i>FS/FA</i>	Large Capacitance (ϕ 4, ϕ 5)	2.5 to 25V	10 to 330 μ F	105°C 2000Hrs	36
	<i>SL</i>	Low Profile (ϕ 6.3)	2.5 to 25V	15 to 330 μ F	105°C 2000Hrs	38
	<i>VA/VB/VC</i>	Molded Chip (7.3 \times 4.3 \times 2.8) Standard / Low ESR	2.0 to 25V	15 to 330 μ F	105°C 1000Hrs	40
	<i>UA/UB</i>	Molded Chip (7.3 \times 4.3 \times 1.9) Low Profile / Low ESR	2.0 to 25V	15 to 220 μ F	105°C 1000Hrs	42

Green Products


Corresponding to the Environmental Requirement

Classification	Lead-free	RoHS compliance	Halogen-free
Radial Lead Type			
SMD Type			

: Completed

System Diagram for FPCAP

Radial Lead Type

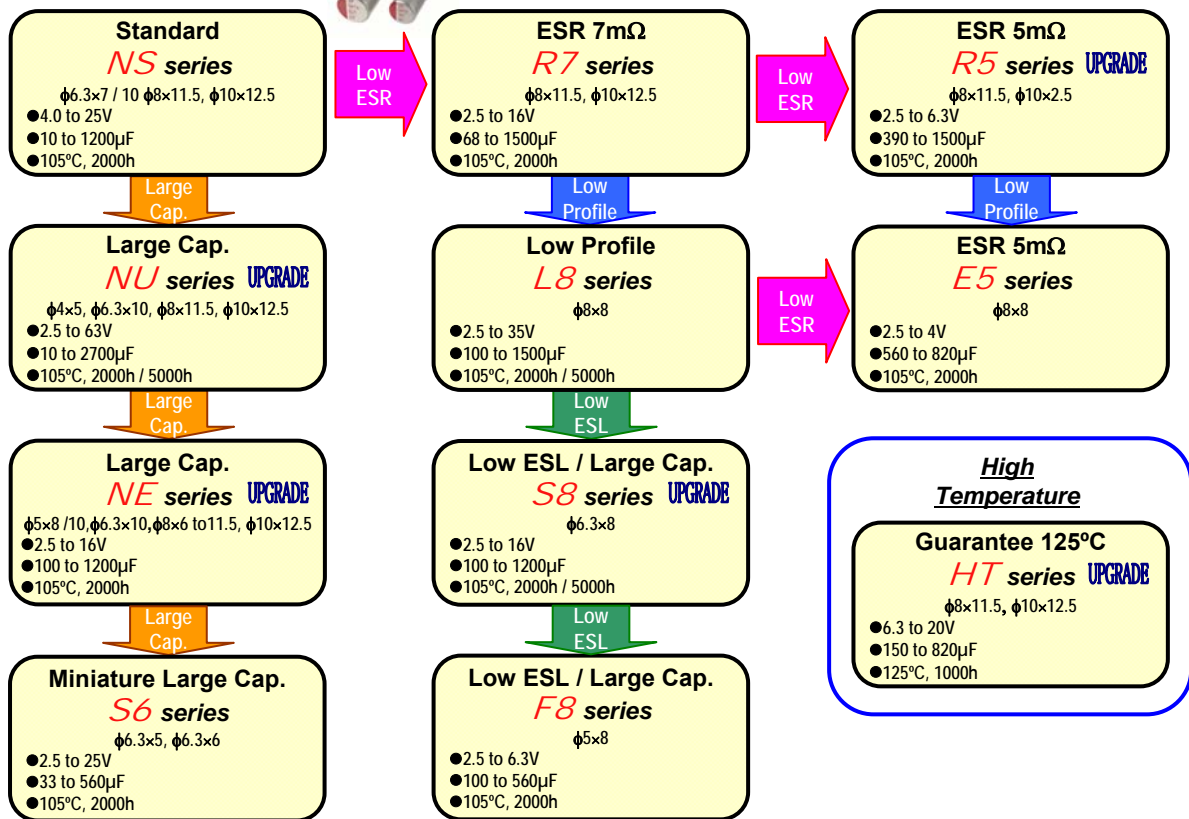

SMD Type

