

※ Trimmed (Cut) or Formed Leads ※ Please refer to page 23 about the FPCAP product spec.


● Radial lead type

In order to identify correct part number for the processed lead product, cut/formed lead code must be added to bulk part number.

● If the bulk part number is up to 11th digit, processed lead coding shall be as follows:



● In case 12th digit is alphabet, it shall be:



● In case 12th digit is numeral, it shall be:



Configurations	Cut / Formed lead code		Dimensions (mm)				Lead configurations
	Code	Case length	φD	F	L	ℓ	
Forming and cutting	[B A]	5mmL,7mmL	4	5	5.0	—	(Code [B A], [B B]) 1.5MAX. (Code [F A], [F V]) 2.5MAX.
	[F A]	Other length	5			—	
	[B B]	5mmL,7mmL	4	5	3.5	—	
	[F V]	Other length	5			—	
Forming and cutting	[S Z]	All Series	10	5	3.2	—	<p>※ Please contact your local Nichicon sales office for the following sizes. — 10mm Diameter parts with 9mm length or less, and 25mm length or larger — 12.5 to 18mm Diameter parts with 12.5mm length or less, and 46mm or larger ※ This operation is available on product made in Japan.</p>
		12.5		—			
		16	7.5	—			
		18		—			
Cutting	[C A]	All length	3	1.0	5.0	—	<p>※ φ 8 × 5 = F: 2.5 ※ Please contact us for the φ 16 to φ 25 × 12.5L products.</p>
			4	1.5		—	
			5	2.0		—	
			6.3	2.5		—	
			8	※ 3.5		—	
			10	5		—	
			12.5			—	
			16	7.5		—	
			18			—	
	20	10	—				
	22		—				
25	12.5	—					
[C P]	All length	Same as above.	4.5	—			
[C C]	All length	Same as above.	4.0	—			
[C V]	All length	Same as above.	3.5	—			
[C T]	All length	Same as above.	3.2	—			
[C M]	All length	Same as above.	3.0	—			
Snap-in	[A E]	5mmL,7mmL	4	5	4.5	1.1	(φ 4, 5, 6.3, 8) (Code [A E]) 1.5 MAX. (Code [A A]) 2.5 MAX.
			5				
	[A A]	Other length	6.3			1.3	
			8				
	[A A]	All length	10	5	4.5	1.3	
			12.5				
			16				
			18	7.5	4.5	1.3	
20							
22			10	5.0	1.8		
25	12.5						

● Conductive polymer aluminum solid electrolytic capacitors : Cutting configurations only

• Lead diameter (φd) and lead pitch (P) are subject to capacitor specifications.

End seal Configuration ※ Please contact us about the FPCAP.

Configuration	※2		※1		
φ(mm)	3	5 · 6.3	4 · 8 · 10	12.5 · 16 · 18	20 · 22 · 25

Exception : φ5, φ6.3 case size of UMA, UMR, UMF, UMP, UMT, UMW, USA, USF, USP, USR, UST, USW, UPW (7mmL), UTT (7mmL) : configuration ※1
 φ6.3 × 6mmL, φ6.3 × 9mmL, φ8 × 7mmL, φ8 × 9mmL, φ10 × 8mmL, φ10 × 10mmL size of PLF*, PLE*, PLG*, PLS*, PLV*, PLX*, UMV, USV, UPV
 [9] will be put at 12th digit of type numbering system of UCS, UPZ : configuration ※2

* Conductive polymer aluminum solid electrolytic capacitors

※ Taped Leads for Automatic Insertion Systems

※ Please refer to page 23 about the FPCAP product spec.

- Radial lead type (Applicable standard JIS C0806-2)
In order to identify correct part number for the taped product, taping code must be added.


- If the bulk part number is up to 11th digit, taping code shall be as follows: 12 13 14



- In case 12th digit is numeral, it shall be




- In case 12th digit is alphabet, it shall be




Specifications				Capacitor diameter (φ)	Taping code	
Packaging	Lead style	F	P ₀		Code	Applicable size
Ammo-pack	Formed lead	See Table 1	12.7	3 to 8	TE	φ4 to 8 Case length (5mmL, 7mmL) φ3×5 φ5×9 to φ8×9, φ5×11 to φ8×20
					TP	
	Straight lead	See Table 2	12.7	4 to 10	TP	φ4 to 8 Case length (5mmL), φ6.3×6※ φ4 to 6.3 Case length (7mmL), φ4 φ5×9 or more, φ6.3×9 or more, φ8×7 or more, φ10×8 to 25
					TD	
		See Table 2	15.0	12.5	TO	φ12.5×12.5 to 25
		See Table 2	15.0	16, 18	TN	φ16×15 to 25, φ18×15 to 25

Notes: ※ Conductive polymer aluminum solid electrolytic capacitors

(Formed lead type)

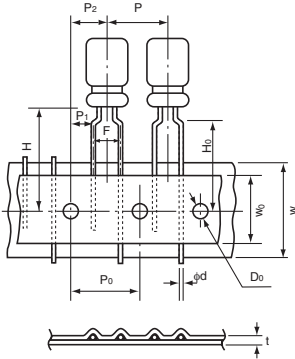

(Straight lead type)

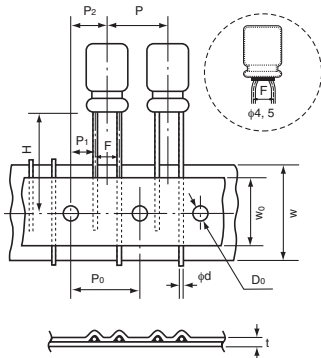

- Special taping specifications on H, F, and K. dimensions other than the above figures are available upon request.
- Conductive polymer aluminum solid electrolytic capacitors: Straight lead type only
- Only the above mentioned dimensions are specified.

Table 1

Item	Case Size Taping Code	Tolerance	Formed Lead Type						Case dia (φ) × Length (L)				
			φ3 × 5			φ4 × 5 φ5 × 5 φ6.3 × 5 φ8 × 5			φ5 × 9 φ6.3 × 9		φ8 × 9	φ8 × 11.5	φ8 × 15
			TP	TE	TE	TA	TA	TA	TA	TA			
φd Lead-wire diameter		±0.05	0.40	0.45 (φ8 × 7 : 0.5)			0.5		0.6				
P Pitch of component		±1.0	12.7	12.7			12.7		12.7				
P ₀ Feed hole pitch		±0.2	12.7	12.7			12.7		12.7				
P ₁ Hole center to lead		±0.5	5.1	3.85			3.85		3.85				
P ₂ Feed hole center to component center		±1.0	6.35	6.35			6.35		6.35				
F Lead-to-lead distance		+0.8 -0.2	2.5	5.0			5.0		5.0				
H Height of component from tape center		±0.75	18.5	17.5			18.5		20.0				
H ₀ Lead-wire clinch height		±0.5	16.0 ※3	16.0			16.0		16.0				
W Tape Width		±0.5	18.0	18.0			18.0		18.0				
W ₀ Hold down tape width		MIN.	7.0	7.0			7.0		7.0				
φD ₀ Feed hole diameter		±0.2	4.0	4.0			4.0		4.0				
t Total tape thickness		±0.2	0.6	0.6			0.6		0.6				


Table 2

Item	Case Size Taping Code	Tolerance	Straight Lead Type					Case dia (φ) × Length (L)				
			φ4 × 5 φ4 × 7		φ5	φ6.3	φ8 × 5	φ8 × 7	φ8	φ10	φ12.5	φ16 φ18
			TP	TP, TD	TP, TD	TP	TD	TD	TD	TD	TO	TN
φd Lead-wire diameter		±0.05	0.45	0.45 0.5, 0.6	0.45 0.5, 0.6	0.45	0.5	0.6	0.6	0.6	0.6	0.8
P Pitch of component		±1.0	12.7	12.7	12.7	12.7	12.7	12.7	12.7	15.0	30.0	
P ₀ Feed hole pitch		±0.2	12.7	12.7	12.7	12.7	12.7	12.7	12.7	15.0	15.0	
P ₁ Hole center to lead		±0.5	5.1 (※1 5.35)	5.1 (※1 5.35)	5.1	5.1	4.6	4.6	3.85	5.0	3.75	
P ₂ Feed hole center to component center		±1.0	6.35	6.35	6.35	6.35	6.35	6.35	6.35	7.5	7.5	
F Lead-to-lead distance		+0.8 -0.2	2.5※1	2.5※1	2.5	2.5	3.5	3.5	5.0	5.0	7.5※2	
H Height of component from tape center		±0.75	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	
W Tape Width		±0.5	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	
W ₀ Hold down tape width		MIN.	7.0	7.0	7.0	7.0	7.0	7.0	7.0	12.5	12.5	
φD ₀ Feed hole diameter		±0.2	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	
t Total tape thickness		±0.2	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

Notes: ※ 1 F = 2.0mm is also available, provided Taping code to be TFC. ※ 2 Tolerance on F for φ16 and φ18 units shall be ±0.8mm.
※ 3 Tolerance on Ho for φ3 units shall be 16.0 MIN.

Packaging

- Ammo-pack (Flat box type)

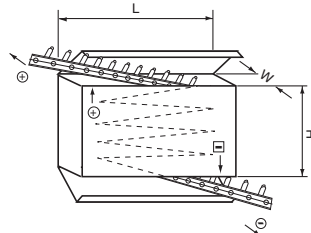

L	H	W	Case Size (φD × L)	Q'ty / Box
340	150	50	3 × 5	2,000
340	200	50	4 × 5, 4 × 7	2,000
340	250	50	5 × 5, 5 × 7	2,000
			8 × 5, 8 × 7, 8 × 8	1,000
340	300	50	6.3 × 5, 6.3 × 6, 6.3 × 7	2,000
340	260	54	5 × 9, 5 × 11	2,000
			8 × 9, 8 × 10, 8 × 11.5, 8 × 12, 8 × 15	1,000
340	200	54	10 × 8, 10 × 9, 10 × 10, 10 × 12.5, 10 × 13, 10 × 15, 10 × 16	500
340	300	54	6.3 × 9, 6.3 × 10.5, 6.3 × 11, 6.3 × 15	2,000
340	260	62	8 × 20	1,000
340	200	62	10 × 20	500
340	200	65	10 × 25	500
330	290	65	12.5 × 12.5, 12.5 × 15, 12.5 × 20	500
			12.5 × 25	
			18 × 15, 18 × 20, 18 × 25	250
320	230	65	16 × 15, 16 × 20, 16 × 25	250

FPCAP Lead forming (Radial lead type)

RNS, RR7, RR5, RL8, RE5, RS8, RF8, RNU, RNE, RNL, RS6, RHT

Components are packaged as per following packing unit.

● Packing Quantity (Bulk)

Case Size φD × L (mm)	Long Lead		Cut Lead	
	Quantity vinyl bag (PCS)	Minimum quantity (PCS / Carton Box)	Quantity vinyl bag (PCS)	Minimum quantity (PCS / Carton Box)
φ4×5	200	8,000	200	8,000
φ5×8, φ5×10	200	3,200	200	4,000
φ6.3×5, φ6.3×6, φ6.3×7	200	4,000	200	4,000
φ6.3×8, φ6.3×10	200	3,200	200	4,000
φ8×6, φ8×8, φ8×9	200	3,200	200	4,000
φ8×11.5	100	2,000	200	2,400
φ8×16	100	1,600	100	2,000
φ8×20	100	1,200	100	1,600
φ10×12.5	100	1,600	100	2,000
φ10×20	100	800	100	1,200

Please note the order quantity must be in multiples of the minimum quantity.

● Bulk Long Lead Part Number

Nichicon P/N : R□□□□□□□ M□□□ □□


FPCAP P/N : FP- □□□RE□□□□M- □□ R

● Cut Lead (Bulk) Dimensions

Lead Forming (Symbol:CG)

Nichicon P/N : R□□□□□□□ M□□□ CG

FPCAP P/N : FP- □□□RE□□□□M- □□ CG

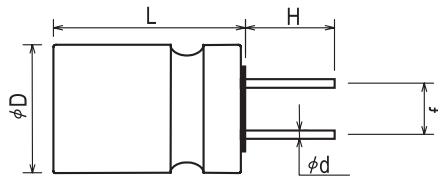

[Unit : mm]

Item	φD×L	φ4×5	φ5×8, φ5×10	φ6.3×5, φ6.3×6, φ6.3×7, φ6.3×8, φ6.3×10	φ8×6, φ8×8, φ8×9, φ8×11.5, φ8×16, φ8×20	φ10×12.5, φ10×20
Lead Forming Symbol		CG	CG	CG	CG	CG
Lead Wire Diameter φd		0.45±0.05	0.5, 0.6±0.05	0.45, 0.5, 0.6±0.05	0.6±0.05	0.6±0.05
Lead Wire Length H		3.1±0.3	3.1±0.3	3.1±0.3	3.1±0.3	3.1±0.3
Lead Wire Interval f		1.5±0.5	2.0±0.5	2.5±0.5	3.5±0.5	5.0±0.5


Note : Please inquire for FPCAP by Packing Unit as above.

FPCAP Taped Leads for Automatic Insertion Systems (Radial lead type)


RNS, RR7, RR5, RL8, RE5, RS8, RF8, RNU, RNE, RNL, RS6, RHT

● Packing Quantity(Ammo Pack)

Size (dia)	Minimum quantity (pcs / Ammo Pack)
φ5	2,000
φ6.3	2,000
φ8	1,000
φ10	500

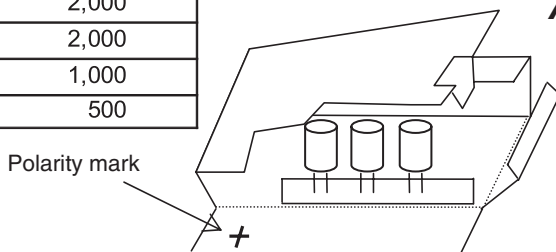

Ammo pack

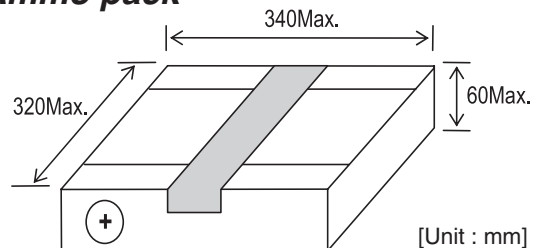

[Unit : mm]


The lid of feeding side of the taping box shall be torn off at the perforation line.

● Taping Dimensions

Lead Forming (Symbol:Ex. PX) Nichicon P/N Symbol : R□□□□□□ M□□□PX
 FPCAP P/N Symbol : FP-□□□RE□□□M-□□ P


■ 2.5mm pitch taping
 Taping Dimensions for $\phi 5$

Nichicon P/N Symbol : JT ($\phi 5 \times 8$) , JX ($\phi 5 \times 10$)
 FPCAP P/N Symbol : JT ($\phi 5 \times 8$) , J ($\phi 5 \times 10$)

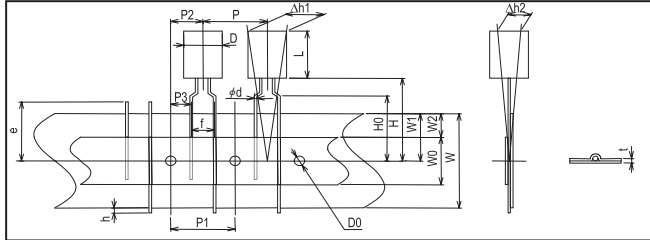


■ 2.5mm pitch taping
 Taping Dimensions for $\phi 6.3$

Nichicon P/N Symbol : JT ($\phi 6.3 \times 5$ to 8) , JX ($\phi 6.3 \times 10$)
 FPCAP P/N Symbol : JT ($\phi 6.3 \times 5$ to 8) , J ($\phi 6.3 \times 10$)

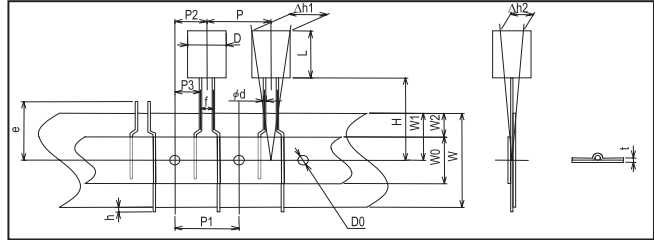


■ 5.0mm pitch taping
 Taping Dimensions for $\phi 5$, $\phi 6.3$, $\phi 8$

Nichicon P/N Symbol : PX
 FPCAP P/N Symbol : P

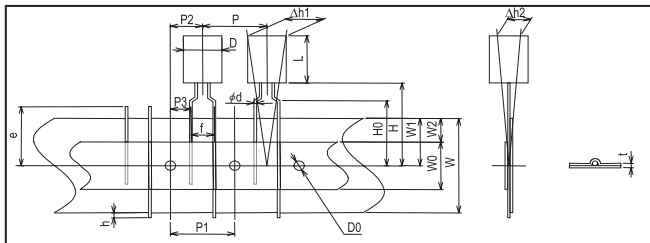

■ 2.0mm($\phi 5$) or 3.5mm($\phi 8$) or 5.0mm($\phi 10$) pitch taping
 Taping Dimensions for $\phi 5$, $\phi 8$, $\phi 10$

Nichicon P/N Symbol : TX ($\phi 5$) , KX ($\phi 8$) , PH ($\phi 10$)
 FPCAP P/N Symbol : T ($\phi 5$) , K ($\phi 8$) , PH ($\phi 10$)

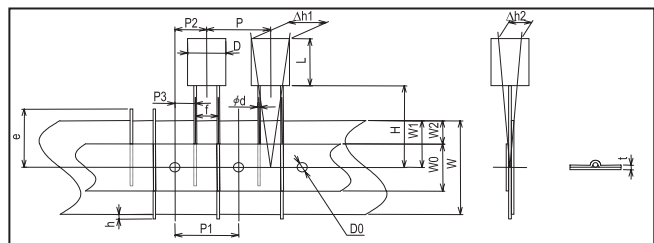

● Specification Table

[Unit : mm]

Item	$\phi D \times L$	$\phi 6.3 \times 6$, $\phi 6.3 \times 7$	$\phi 5 \times 8$, $\phi 6.3 \times 8$	$\phi 6.3 \times 5$, $\phi 5 \times 8$	$\phi 5 \times 10$, $\phi 6.3 \times 10$	$\phi 6.3 \times 6$, $\phi 6.3 \times 7$	$\phi 5 \times 8$, $\phi 6.3 \times 8$	$\phi 5 \times 10$, $\phi 6.3 \times 5$, $\phi 6.3 \times 10$	$\phi 8 \times 6$, $\phi 8 \times 8$, $\phi 8 \times 9$, $\phi 8 \times 11.5$, $\phi 8 \times 16$, $\phi 8 \times 20$	$\phi 5 \times 8$	$\phi 8 \times 6$, $\phi 8 \times 8$, $\phi 8 \times 9$, $\phi 8 \times 11.5$, $\phi 8 \times 16$, $\phi 8 \times 20$	$\phi 10 \times 12.5$, $\phi 10 \times 20$
Lead Forming Symbol (Nichicon P/N)		JT		JX	PX			PX	TX	KX	PH	
Lead Forming Symbol (FPCAP P/N)		JT		J	P			P	T	K	PH	
Lead Wire Diameter ϕd		0.45	0.6	0.5	0.5	0.45	0.6	0.5	0.6	0.6	0.6	
Tolerance		± 0.05	± 0.05	± 0.05	± 0.05	± 0.05	± 0.05	± 0.05	± 0.05	± 0.05	± 0.05	
Lead Wire Interval f		2.5 +0.8/-0.2 ($\phi 6.3$: 2.5 ± 0.5)				5.0 +0.8/-0.2			5.0 +0.8/-0.2	2.0 +0.8/-0.2	3.5 +0.8/-0.2	5.0 +0.8/-0.2
Pitch Between Components P		12.7 ± 1.0				12.7 ± 1.0			12.7 ± 1.0	12.7 ± 1.0	12.7 ± 1.0	12.7 ± 1.0
Feed Holes Position Gap $P1$		12.7 ± 0.3				12.7 ± 0.3			12.7 ± 0.3	12.7 ± 0.3	12.7 ± 0.3	12.7 ± 0.3
Feed Holes Position Gap $P2$		6.35 ± 1.0				6.35 ± 1.0			6.35 ± 1.0	6.35 ± 0.5	6.35 ± 0.5	6.35 ± 0.5
Lead Wire Clinch Height $H0$		—				16.0 ± 0.5			16.0 ± 0.5	—	—	—
Components Height H		18.5 ± 0.5				17.5 ± 0.5			20.0 ± 0.75	18.5 ± 0.5	20.0 ± 0.5	18.5 ± 0.5
Base Tape W		18.0 +1.0/-0.5				18.0 +1.0/-0.5			18.0 +1.0/-0.5	18.0 +1.0/-0.5	18.0 +1.0/-0.5	18.0 +1.0/-0.5
Feed Holes Position Gap $W1$		9.0 ± 0.5				9.0 ± 0.5			9.0 ± 0.5	9.0 ± 0.5	9.0 ± 0.5	9.0 ± 0.5
Feed Holes Diameter $D0$		4.0 ± 0.2				4.0 ± 0.2			4.0 ± 0.2	4.0 ± 0.2	4.0 ± 0.2	4.0 ± 0.2
Components Alignment Δh		2.0 max.				2.0 max.			2.0 max.	2.0 max.	2.0 max.	2.0 max.
Tape Thickness t		0.6 ± 0.2				0.6 ± 0.2			0.6 ± 0.2	0.6 ± 0.2	0.6 ± 0.2	0.6 ± 0.2