


■ For Motor Starting (Fail Safe Type)

This case type Posi-R is ideally suited for motor starting in various home appliances like refrigerators, freezer and home-type air conditioners. In case of failure on products, circuit will be opened with fail safe system.

■ Type numbering system

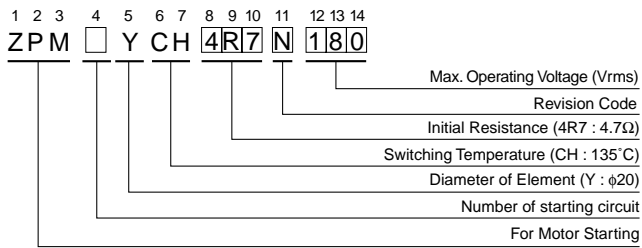

Form of motor starting circuit	RSIR	RSCR	CSR	CSIR
Number of starting circuit	1	2	3	4
Motor starting circuit				

■ Specification

Type No.	Initial Resistance (at 25°C)	Switching Temperature	Max. Operating Voltage (Vrms)	Max. Inrush Current (Arms)
ZPM□YCH4R7N180	4.7Ω ±25%	135°C	180	12
ZPM□YCH6R8N200	6.8Ω ±25%		200	10
ZPM□YCH100N225	10Ω ±25%		225	9
ZPM□YCH150N250	15Ω ±25%		250	8
ZPM□YCH220N300	22Ω ±25%		300	7
ZPM□YCH330N355	33Ω ±25%		355	6
ZPM□YCH470N400	47Ω ±25%		400	5

Symbol □ is number of starting circuit.

UL approval types are also available upon request.

Please contact us if you have any request for other specifications.

